

The Binding Tool – TQM Products



Fig 1 – Attach binding to quilt, leaving a 12” space and 10” tails on each end.

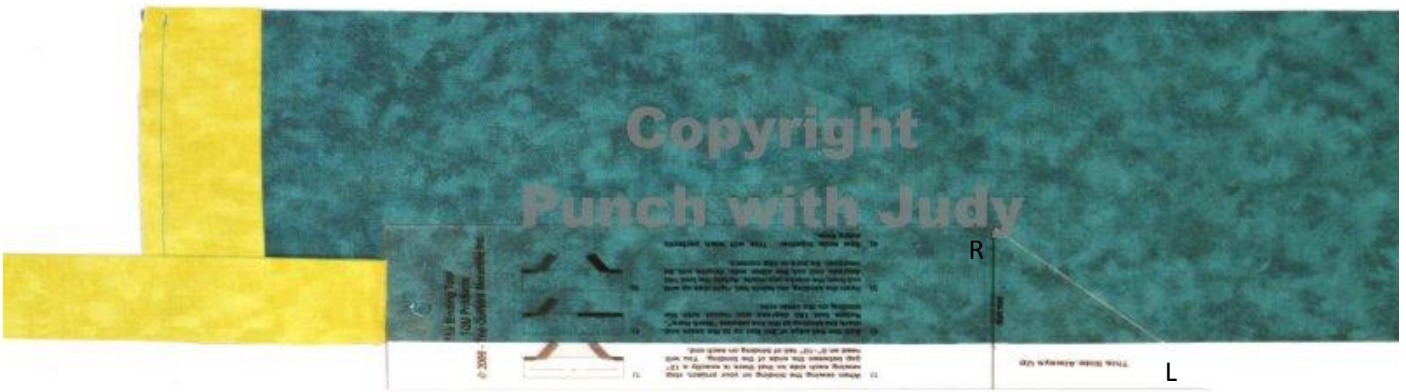


Fig 2 – Fold binding back and butt the flat edge of the tool against the edge of the stitching under the binding as shown.

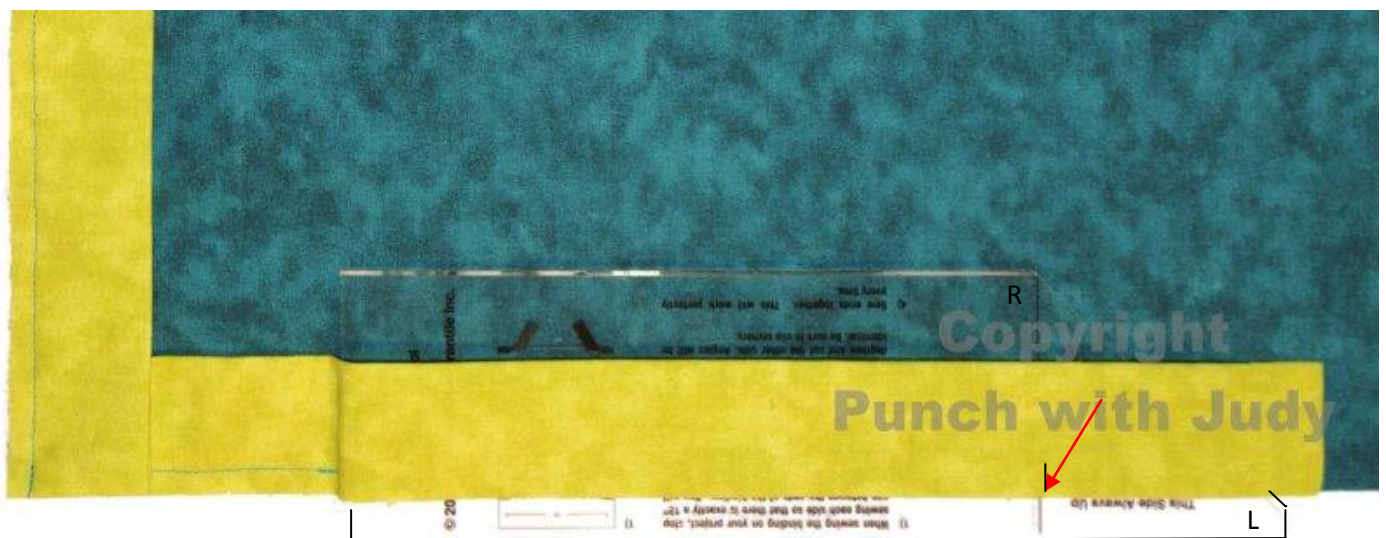


Fig 3 – Bring the binding over the top of the tool and place a mark on the raw edge of the binding at the ‘Mark Here’ line of the tool.



Fig 4 – Rotate the tool 180° and repeat with the binding on the right hand side marking on the 'Mark Here' line.

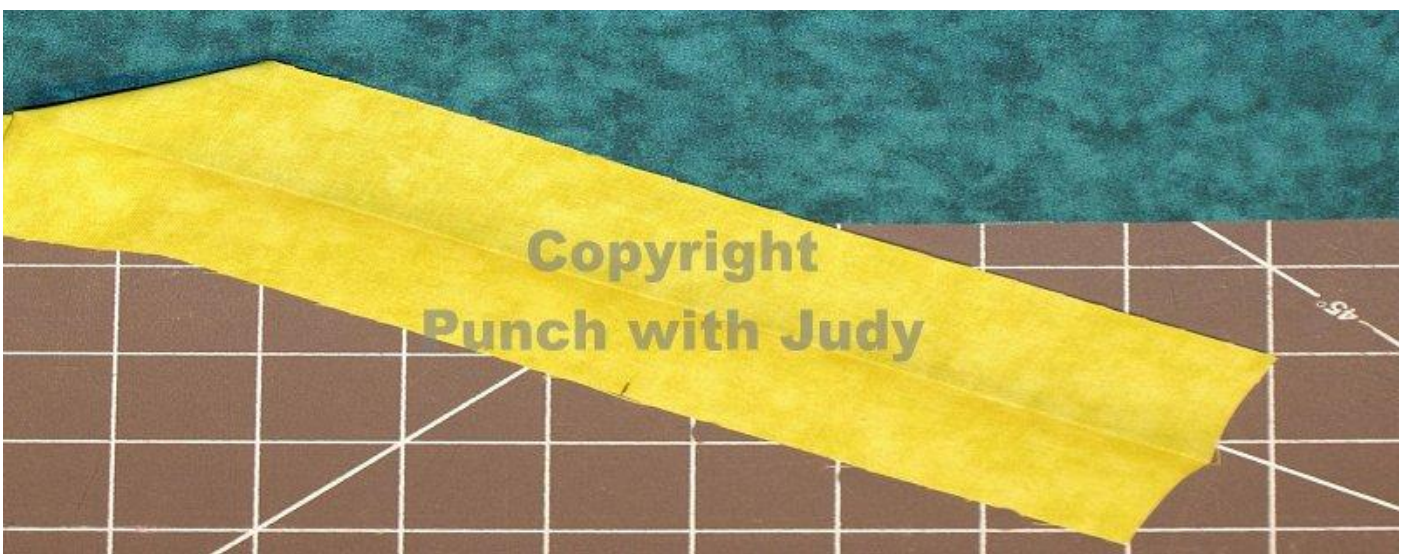


Fig 5 – Place the left hand side of binding on a cutting mat, open out the fabric with the right side of the fabric facing up.

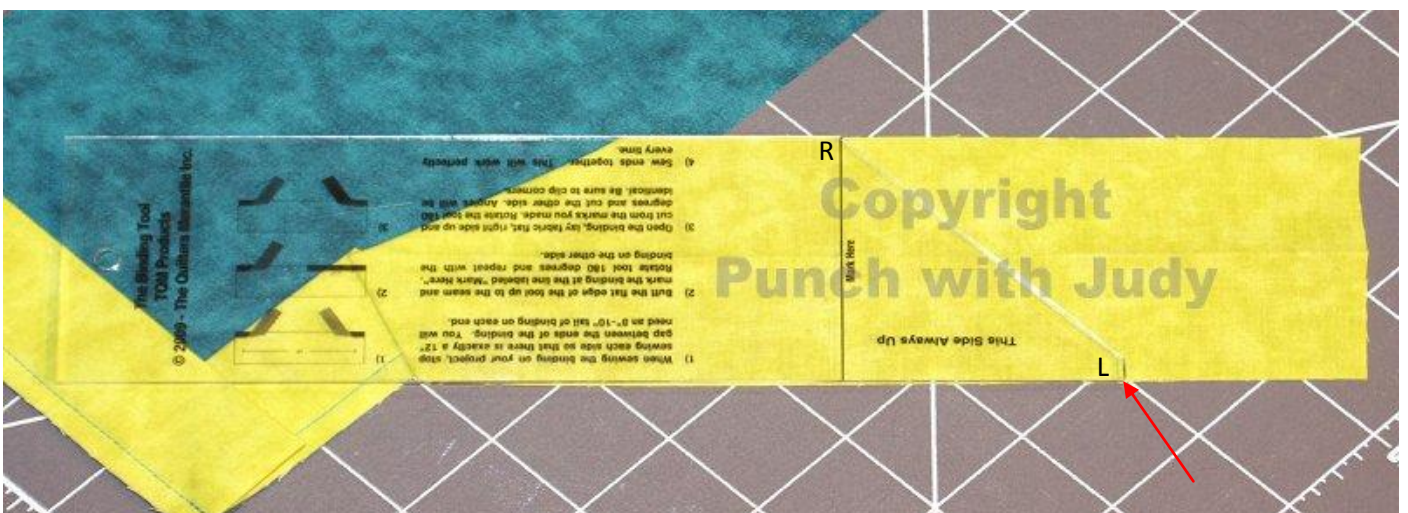


Fig 6 – Position the tool on top of the binding, with the point of the tool on the mark.



Fig 7 – Cut along the angled edge of the tool as well as the ¼” point.

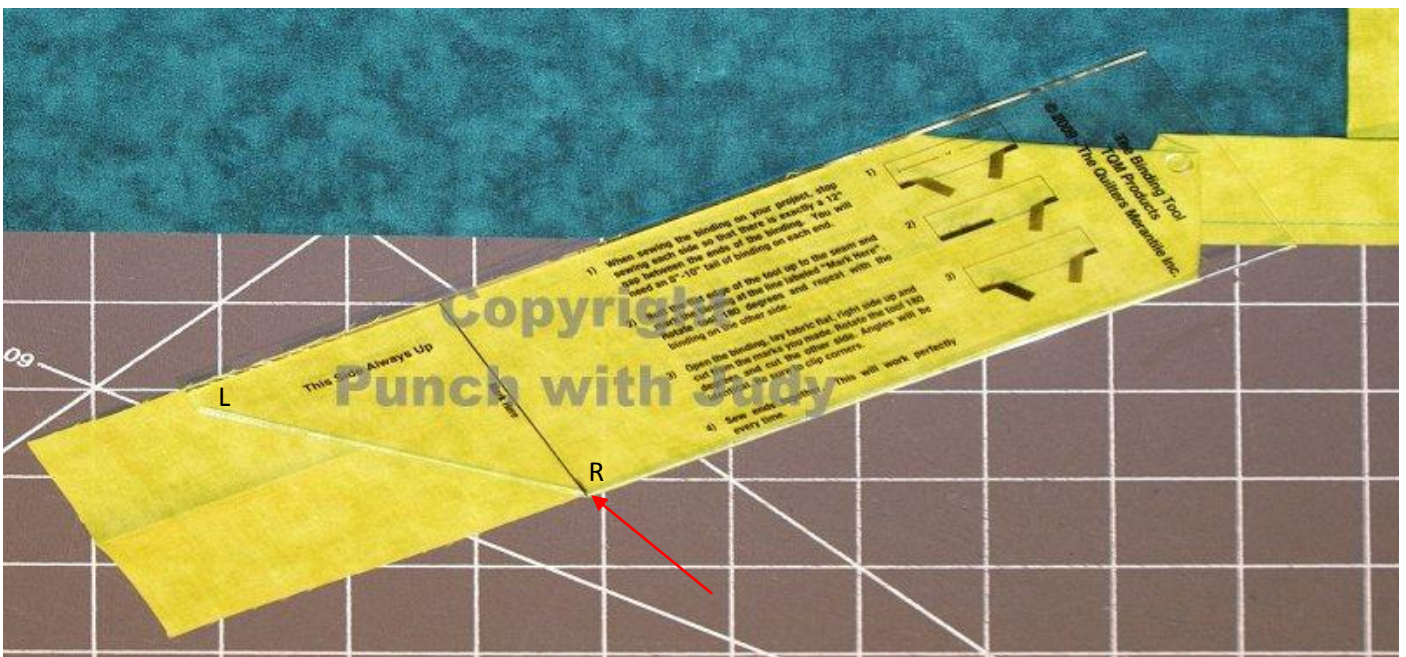


Fig 8 – Place right hand side binding with the right side of fabric facing up, on cutting mat. Rotate the tool 180° and place the tool on top of the binding, placing the 'Mark Here' line on your drawn mark.



Fig 9 – Cut along the angled edge as well as the ¼” point.



Fig 10 – Stitch the binding ends together with a ¼” seam allowance and press the seam.

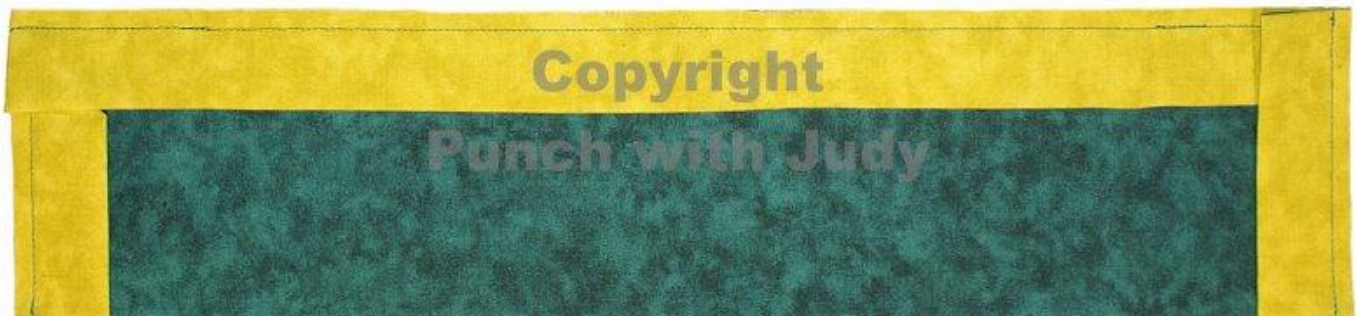


Fig 11 – Fold binding in half with wrong sides together and press. Sew the last section of the binding to the quilt edges.



Fig 12 – Press binding to the back over the raw edges of the quilt, hand or machine stitch in place.



Punch with Judy "Your Creative Sewing Specialist"

P.O. Box 62 THE ROCK (near Wagga) N.S.W.

AUSTRALIA. 2655

Website: www.punchwithjudy.com.au